


TECHNICAL DATA

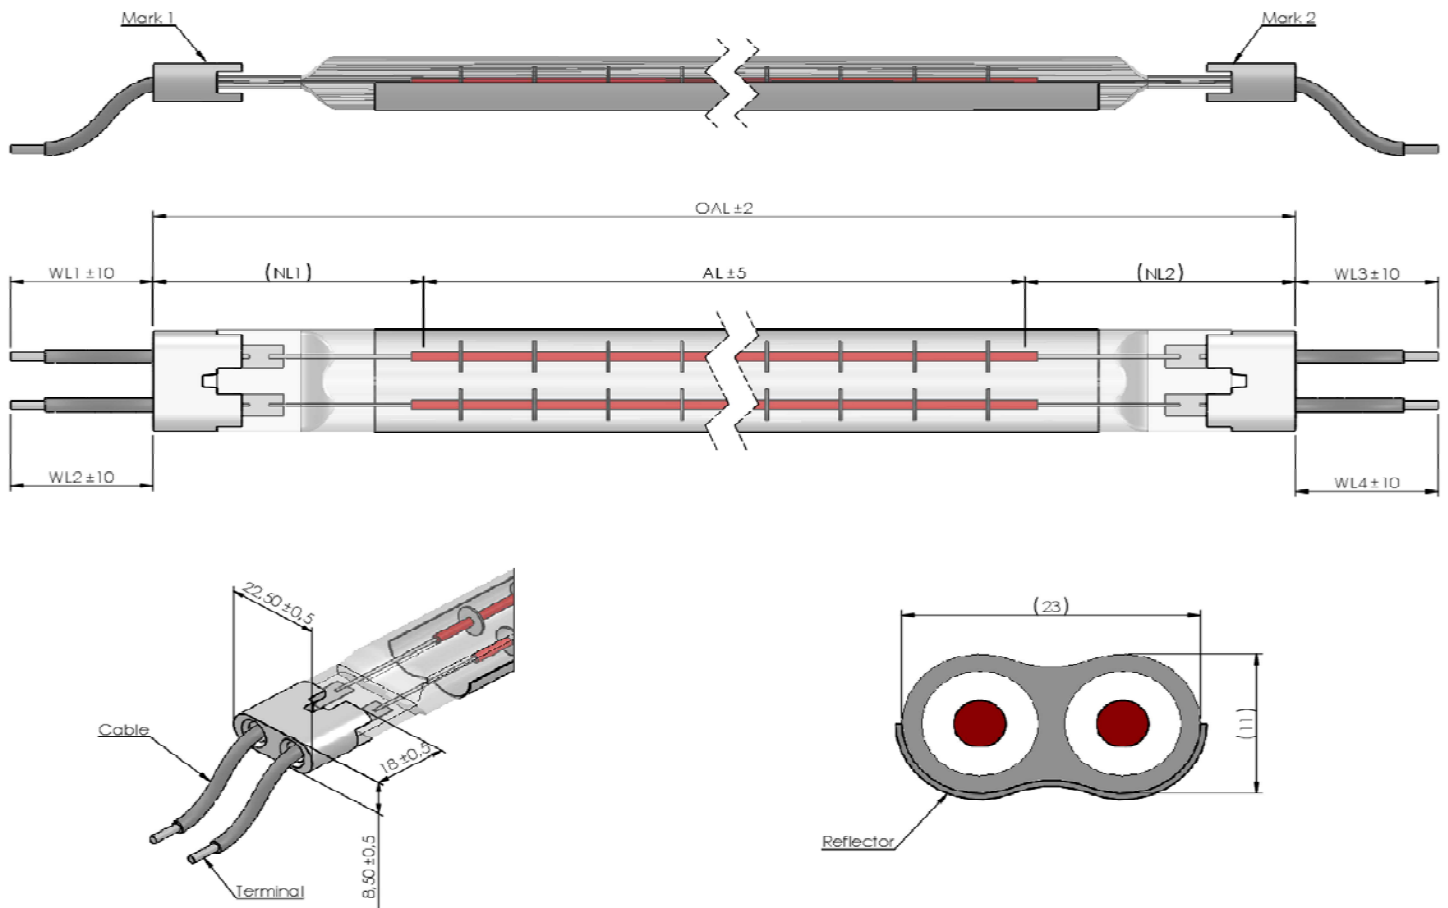

1° - Electrical data :

Nominal voltage	Wattage	Average life time*	Tc	Lighting position
440 V	4000 W $\pm$ 5% (2000W + 2000W)	5000 Hrs	2200 K	Horizontal

* with AC power supply, 50 or 60 Hz, continuously at room temperature and free from vibration.

2° - Dimensional data :

OAL	AL	NL1	NL2
710 mm $\pm$ 2	640 mm $\pm$ 5	(35 mm)	(35 mm)

3° - Cable data :

Cable Type	Terminal	WL 1 & WL2	WL 3 & WL4
Silicable CNVAS 1mm ² 400° (grey) OMERIN or equivalent	End Stripped (7mm)	500 mm $\pm$ 10	500 mm $\pm$ 10

4° - Marking :

Mark 1	Mark 2
DIRTECH + Lot	DTC440V4000W 645KrH

Emitter type
C

Twin Tube Short Wave Emitter			Modif	0					
			Date	16/09/2026					
DTC 440V 4000W 645 KrH			Comments	Original					
Date	DIRTECH®	Drawing number							
16/09/2026		IC-3552							