

DATA SHEET



Product Name **LT 24W T5 930**
Article No. 17424_0010
Costumer Art. No. NARVA
Type 930

Application

Full spectrum lamp

General Information

Nominal wattage	24 W
Nominal Length	549 mm
Luminous flux after 100 hrs operating (25°C)	1500 lm
Luminous flux after 100 hrs operating (35°C)	1600 lm
Cap base	G5
Useful Lifetime	35 000 h
Mercury content (nominal)	2,5 mg
maximum mercury permissible according to RoHS	15 mg
Dimmable	Yes

Electrical data


On-mode power P_{on}	23,0 W
Type of power supply	230 V / AC / 50 Hz
Operating current	0,323 A
Operating voltage	72 V

DATA SHEET

Product Name **LT 24W T5 930**
Article No. 17424_0010
Costumer Art. No. NARVA
Type 930

Light technical data

Useful luminous flux* (25°C) 1500 lm
Useful luminous flux* (35°C) 1600 lm
Correlated colour temperature 3000 K
Colour rendering index ≥ 90
Temperature for max. luminous flux 35 °C

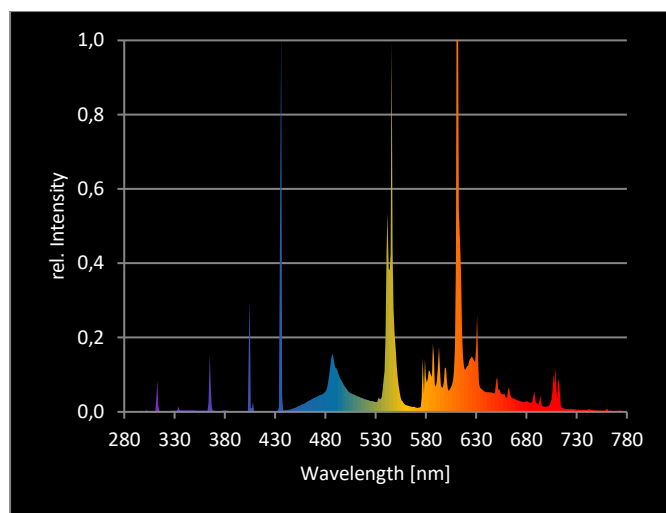

Lamp lumen maintenance factor after:

2000 h	97,5 %
4 000 h	95,0 %
8 000 h	93,0 %
12 000 h	91,5 %
16 000 h	90,0 %
24 000 h	88,2 %
35 000 h	87,2 %

Lamp survival factor after:

2000 h	99,8 %
4 000 h	99,6 %
8 000 h	99,2 %
12 000 h	98,8 %
16 000 h	98,4 %
24 000 h	94,0 %
35 000 h	50,0 %


* Without auxiliary equipment such as ballasts. All values for operation cycle. Distance 25cm

DATA SHEET

Product Name **LT 24W T5 930**
Article No. 17424_0010
Costumer Art. No. NARVA
Type 930

Dimension

Length A_{max} (cap – cap) 549,0 mm
Length B_{min} (cap – pin) 553,7 mm
Length B_{max} (cap – pin) 556,1 mm
Length C_{max} (pin – pin) 563,2 mm
Diameter d_{max} 16,0 mm

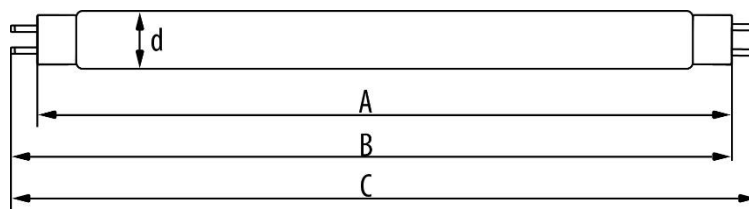

Shipping data

Lamp weight net 54 g
Lamp weight gross 62 g
Content of packaging unit 25 pieces
Length of packaging unit 0,605 m
Width of packaging unit 0,105 m
Height of packaging unit 0,105 m
Volume of packaging unit 0,007 m³
Weight of packaging unit 1,69 kg

Note

The statement given is based on average data, achieved under measurement conditions of Manufacturer. For technical and physical reasons, the values of the individual lamps can vary.

Subject to change.